



**Tel: +86-755-28282235**

**Fax: 86-0755-28282035**

**E-mail: market@semlight.com**

**Website: http://www.semlight.com**

### ◆LED bar light series/ LED铝条灯系列



Non-waterproof LED bar light series 不防水LED铝条灯系列

#### Main Features:

- ◇ This rigid bar is high-end and durable. It is composed of aluminum base board, aluminum gutter and cover. Three LEDs are as a cuttable unit. There are fittings for installation. It can be fixed on the wood board or wall with screws. It is easy for installation and use.
- ◇ Wide emitting angle and illuminate range, uniform illumination.
- ◇ Safe and reliable under DC12V/ DC24V low voltage power supply
- ◇ The LED rigid bar without V shape casing is also available. There is heat-resistant tape at the back of the aluminum base board. It can stick to the wall, glass or wood board for fixation.
- ◇ The length of the rigid bar is optional. The maximum length is 3m per piece.

#### 主要特点:

- ◇ 高档耐用，由铝基板和V形铝槽制成，每3颗LED一组，可以分组截断使用，有用于转角连接的配件和安装固定的支架，安装使用方便；
- ◇ 发光角度大，照射范围广，发光均匀一致；
- ◇ DC12V或者DC24V低压供电安全可靠；
- ◇ 可以选择不用V形外壳，在铝基板后面贴有耐高温3M背胶，贴在墙壁，玻璃，木板表面固定使用。
- ◇ 可以选择任意长度，最长可以做到3米/PCS。

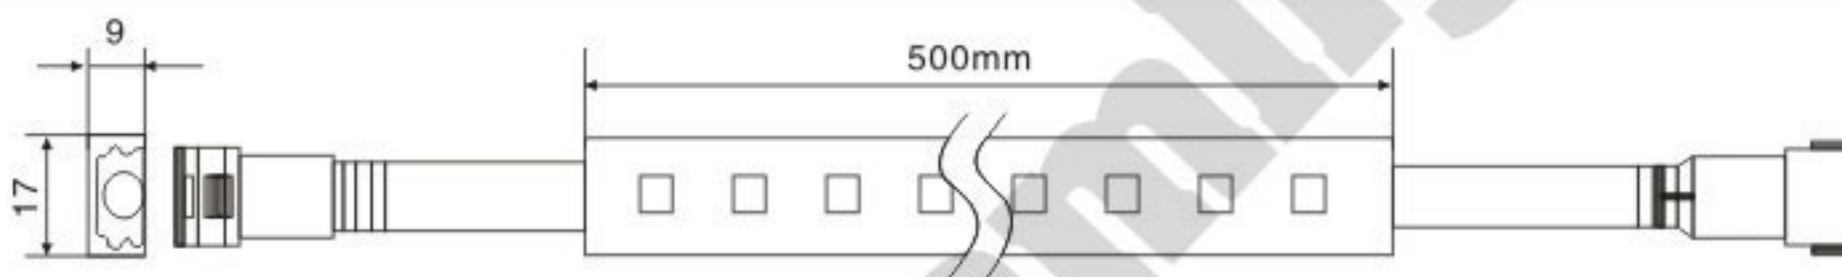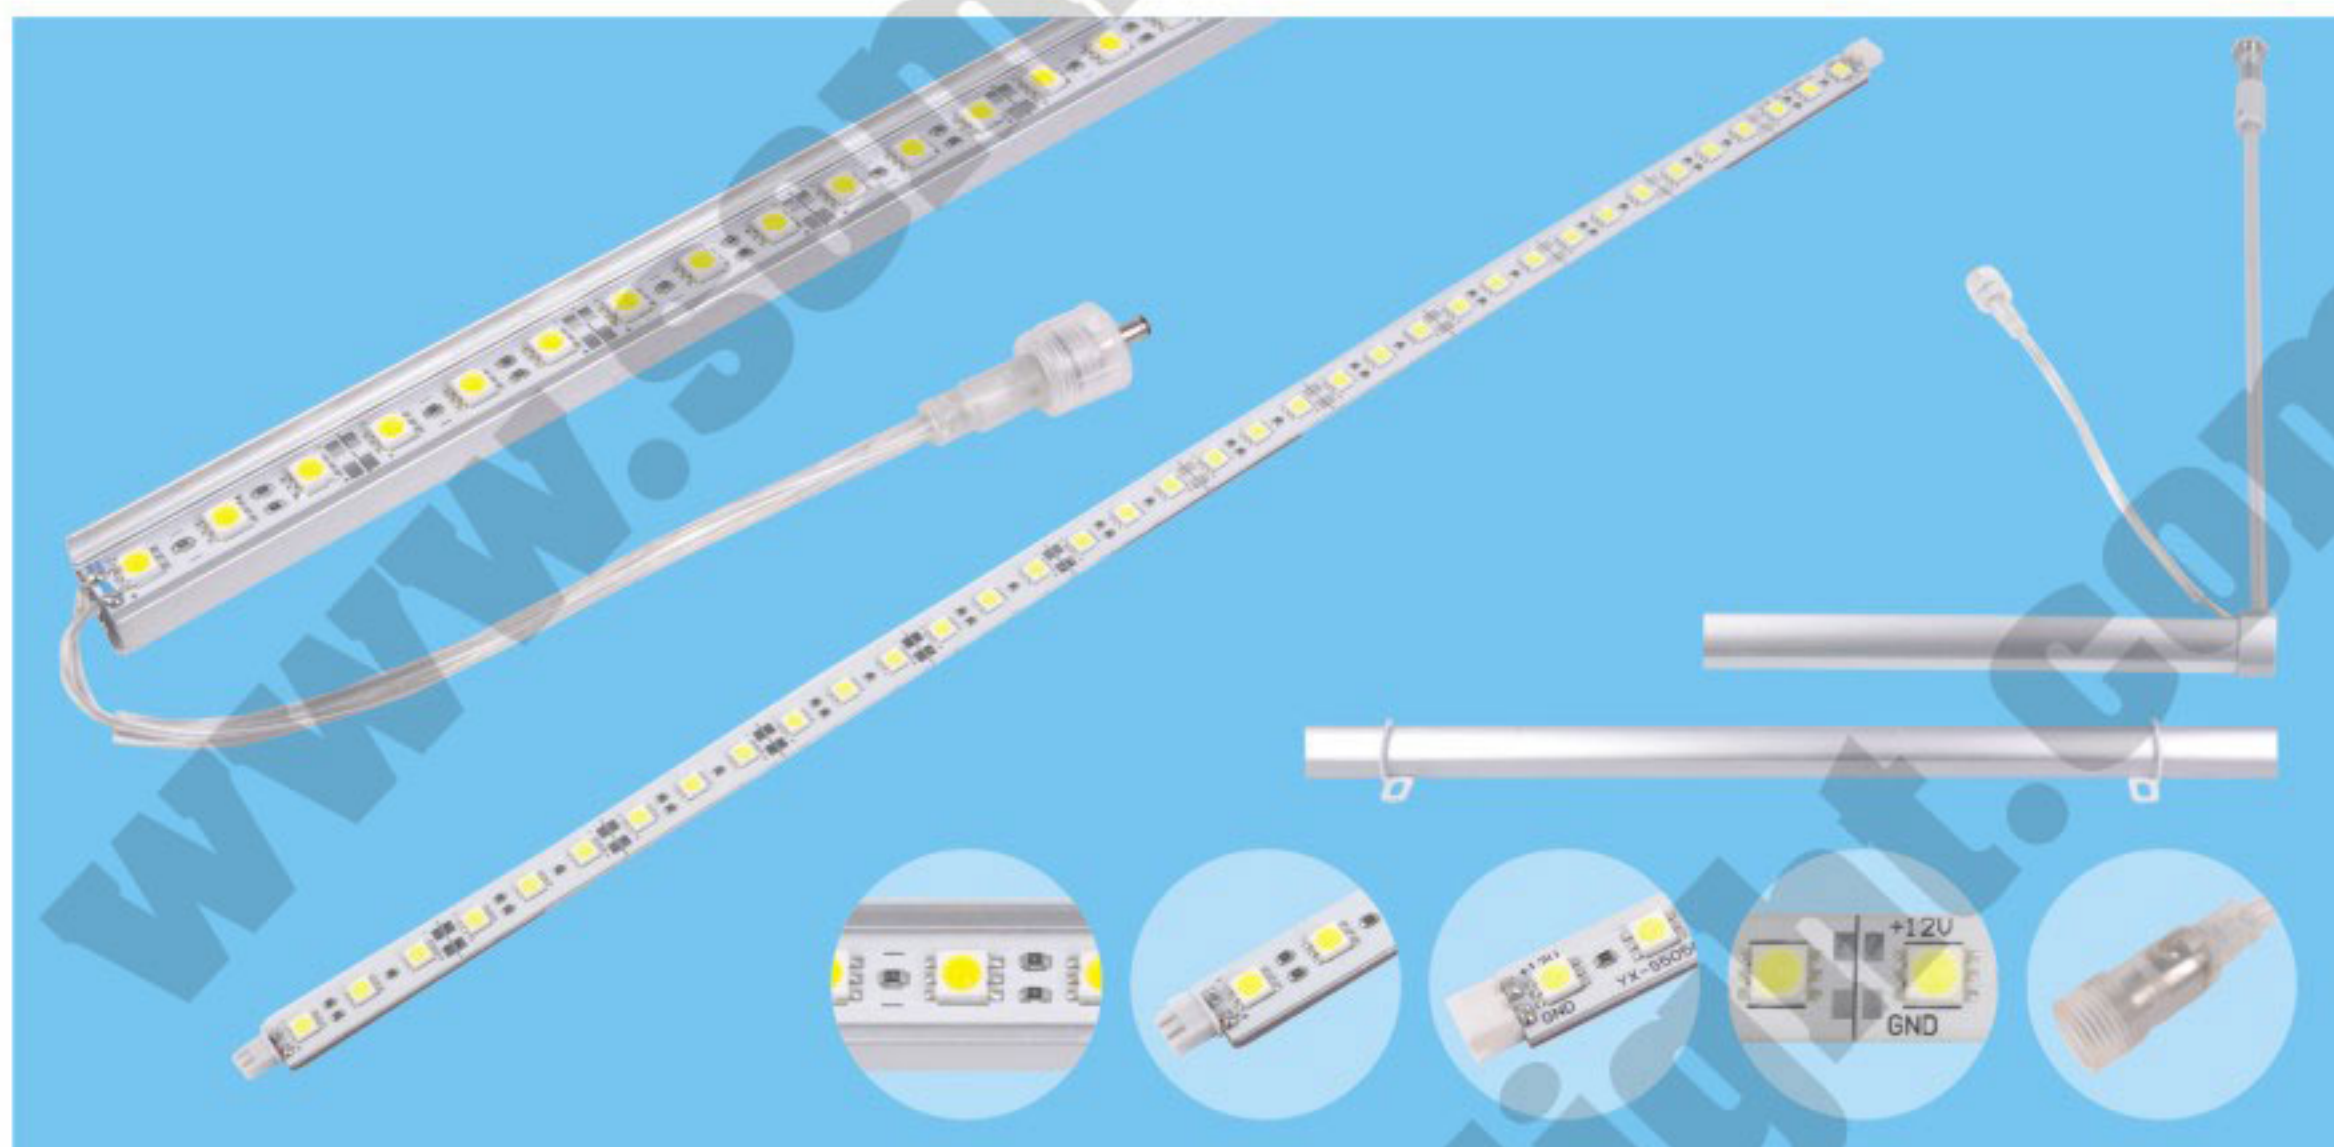

#### Product parameter:

LED	Part number	Emitting Color	Wave Length Color Temperature	LED Quantity	Input Voltage	Power	Luminous flux	View Angle
SMD5050	SEM-WW5050-P72	Warm white	3000-3500K	72LED/m	DC12V or DC24V	<14W/m	800-1000LM/m	120°
	SEM-B5050-P72PW	Pure white	6000-6500K	72LED/m	DC12V or DC24V	<14W/m	850-1050LM/m	120°
	SEM-B5050-P72R	RED	620-625nm	72LED/m	DC12V or DC24V	<14W/m	500-700LM/m	120°
	SEM-B5050-P72B	Blue	465-470nm	72LED/m	DC12V or DC24V	<14W/m	600-700LM/m	120°
	SEM-B5050-P72G	Green	518-521nm	72LED/m	DC12V or DC24V	<14W/m	700-900LM/m	120°
	SEM-B5050-P72Y	Yellow	585-590nm	72LED/m	DC12V or DC24V	<14W/m	500-700LM/m	120°



Tel: +86-755-28282235

Fax: 86-0755-28282035

E-mail: market@semlight.com

Website: http://www.semlight.com

### ◆LED bar light series/ LED铝条灯系列


Waterproof LED bar light series 防水LED铝条灯系列

#### Main Features:

- ◇ This rigid bar is high-end and durable. It is composed of aluminum base board, aluminum gutter and cover. Three LEDs are as a cuttable unit. There are fittings for installation. It can be fixed on the wood board or wall with screws. It is easy for installation and use.
- ◇ Wide emitting angle and illuminate range, uniform illumination.
- ◇ Safe and reliable under DC12V/ DC24V low voltage power supply
- ◇ Optional length: 0.5M or 1M.

#### 主要特点:

- ◇ 高档耐用，由铝基板和铝槽、面罩制成，每3颗LED一组，有用于安装固定的配件，以螺丝固定于木板或墙壁上使用，安装使用方便；
- ◇ 发光角度大，照射范围广，发光均匀一致；
- ◇ DC12V或者DC24V低压供电安全可靠；
- ◇ 可以选择0.5米/PCS和1米/PCS的长度。

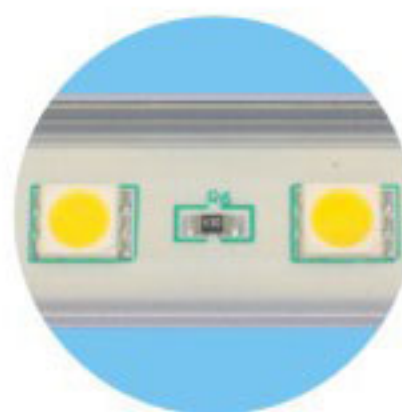

#### Product parameter:

LED	Part number	Emitting Color	Wave Length Color Temperature	LED Quantity	Input Voltage	Power	Luminous flux	Protection level
SMD5050	SEM-B5050-R60WW	Warm white	3000-3500K	30LED/PCS	DC12V or DC24V	<7W/PCS	350-400LM/PCS	IP67
	SEM-B5050-R60PW	Pure white	6000-6500K	30LED/PCS	DC12V or DC24V	<7W/PCS	360-400LM/PCS	IP67
	SEM-B5050-R60R	RED	620-625nm	30LED/PCS	DC12V or DC24V	<7W/PCS	200-300LM/PCS	IP67
	SEM-B5050-R60B	Blue	465-470nm	30LED/PCS	DC12V or DC24V	<7W/PCS	250-350LM/PCS	IP67
	SEM-B5050-R60G	Green	518-521nm	30LED/PCS	DC12V or DC24V	<7W/PCS	200-300LM/PCS	IP67
	SEM-B5050-R60Y	Yellow	585-590nm	30LED/PCS	DC12V or DC24V	<7W/PCS	200-300LM/PCS	IP67



#### Product parameter:

LED	Part number	Emitting Color	Wave Length Color Temperature	LED Quantity	Input Voltage	Power	Luminous flux	Protection level
SMD5050	SEM-B5050-R60WW	Warm white	3000-3500K	30LED/PCS	DC12V or DC24V	<7W/PCS	350-400LM/PCS	IP67
	SEM-B5050-R60PW	Pure white	6000-6500K	30LED/PCS	DC12V or DC24V	<7W/PCS	360-400LM/PCS	IP67
	SEM-B5050-R60R	RED	620-625nm	30LED/PCS	DC12V or DC24V	<7W/PCS	200-300LM/PCS	IP67
	SEM-B5050-R60B	Blue	465-470nm	30LED/PCS	DC12V or DC24V	<7W/PCS	250-350LM/PCS	IP67
	SEM-B5050-R60G	Green	518-521nm	30LED/PCS	DC12V or DC24V	<7W/PCS	200-300LM/PCS	IP67
	SEM-B5050-R60Y	Yellow	585-590nm	30LED/PCS	DC12V or DC24V	<7W/PCS	200-300LM/PCS	IP67